


BarSeal

BarSeal is a rapid permanent repair and reinstatement system for gas sampling bar holes and core drill holes in road and pavement surfaces. The material is supplied in a 400ml cartridge for easy application. It is able to cure under water and at temperatures as low as -10°C .

The two standard colours are clear and black, but the material is also available in red, green and brown. BarSeal can also be used for cracks, small road repairs and jointing around gutter and meter boxes.

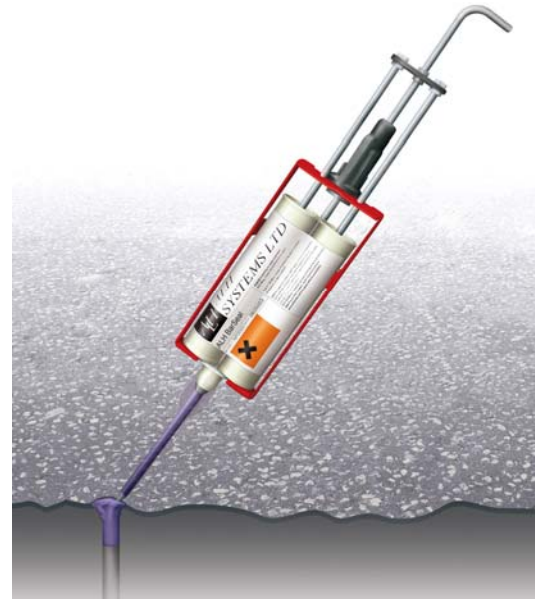

Holes Filled per cartridge

Road	Depth	Hole Diameter					
		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Cat	mm						
Type 1	40mm	77	34	19	14	9	5
Type 2	40mm	77	34	19	14	9	5
Type 3	40mm	77	34	19	14	9	5
Type 4	40mm	77	34	19	14	9	5
Rigid	60mm	52	23	19	9	9	3



Spare nozzles and foam are also available.

Bar Hole Plugs

These specially formulated asphalt plugs provide the means to fill bar holes and cores quickly, easily and economically, saving time and money. No extra filling is necessary. Standard bar hole sizes available are 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3" and 4".

For best results the temperature should be above 5°C prior to use.

- ALH plugs come specially coated with a release agent to prevent them adhering together
- Manufactured in-house
- Available in non-skid bitumen for larger sizes
- Special sizes also available

